



6882-600

- To check the accuracy of table movements of machine tools and calibrate CMM
- Horizontal use and vertical use
- Constructed with ceramic gage blocks
- Can be used with stand
- Optional accessory: stand (code **6877**)

Standard accuracy


Code	Size	Step	A	B
6882-300*	0-300mm	10mm	310mm	350mm
6882-400*	0-400mm	10mm	410mm	450mm
6882-500*	0-500mm	10mm	510mm	550mm
6882-600*	0-600mm	10mm	610mm	650mm
6882-1000*	0-1000mm	10mm	1010mm	1050mm

High accuracy

Code	Size	Step	A	B
6882-300H*	0-300mm	10mm	310mm	350mm
6882-400H*	0-400mm	10mm	410mm	450mm
6882-500H*	0-500mm	10mm	510mm	550mm
6882-600H*	0-600mm	10mm	610mm	650mm
6882-1000H*	0-1000mm	10mm	1010mm	1050mm

Accuracy

Range(mm)	Standard accuracy	High accuracy
≤300	±1.3µm	±0.8µm
>300, ≤400	±1.6µm	±1.0µm
>400, ≤500	±2.0µm	±1.0µm
>500, ≤600	±2.5µm	±1.0µm
>600, ≤800	±3.0µm	±2.5µm
>800, ≤1000	±4.0µm	±2.5µm

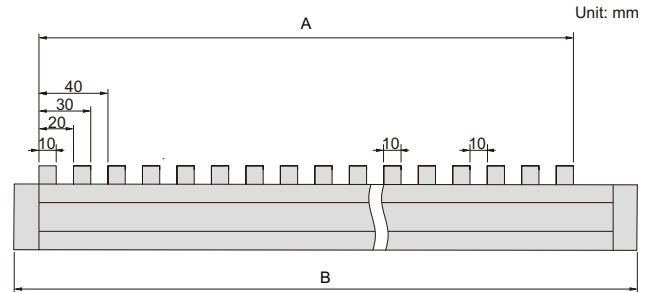

horizontal use



can be used with stand

* Supplied with manufacturer inspection certificate