

ROUGHNESS TESTER

CODE ISR-T120

BLUETOOTH



TOUCH SCREEN

CAN BE OPERATED BY
MOBILE PHONES OR COMPUTERS


DATA
OUTPUT




- Roughness tester can be operated by mobile phones (only Android system) or computers
- Data can be sent to Excel by connecting to computers via bluetooth or SPC cable
- Built-in printer can print measurement results and graphics
- 22 roughness parameters
- Meet ISO, DIN, ANSI, JIS standards
- Display roughness values, profile and curve
- Memory of maximum 100 data and waveform
- Built-in lithium battery, working time more than 50 hours
- Automatic power off

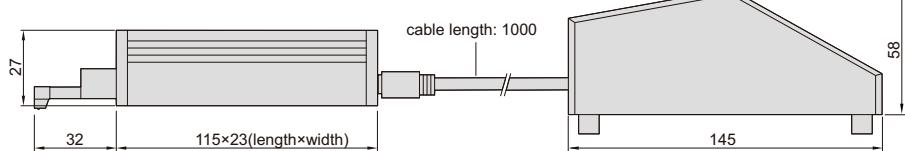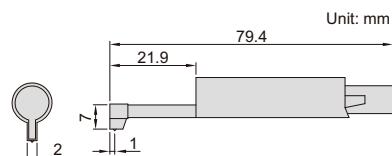


roughness tester screen display



measurement result



roughness profile




Rmr analysis



operate roughness tester by mobile phones










operate roughness tester by computers

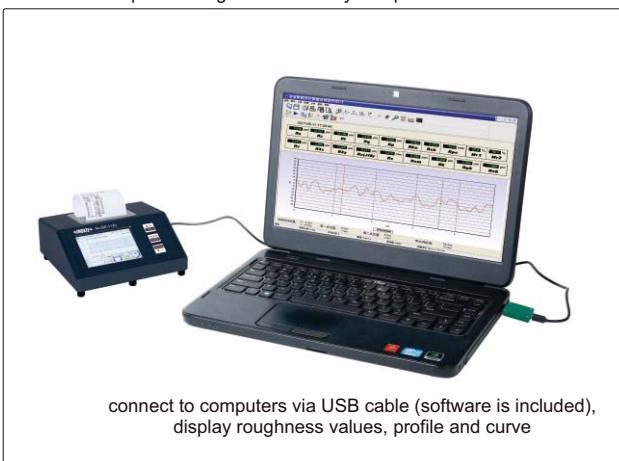


data can be sent to Excel by connecting to computer via bluetooth or SPC cable

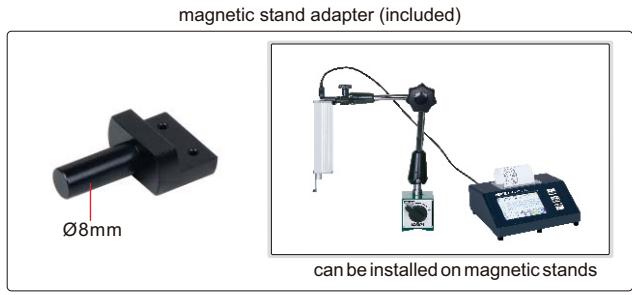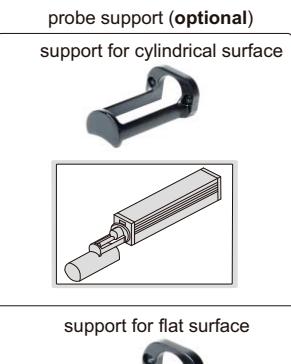

NOTE: Please check whether the adapter can fit your height gages. When using INSIZE height gages, please use the dial test indicator holder of height gages

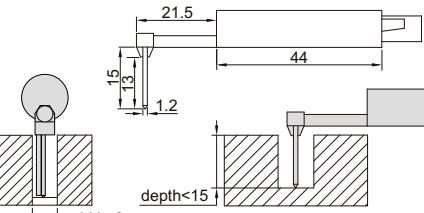optional probes				Unit: mm
extension rod (optional), code ISR-C002-ER 	small hole probe (optional), code ISR-C002-PROBE 	tiny hole probe (optional), code ISR-C002-SBP 	2µm/60° probe (optional), code ISR-C300-P2UM <small>(When Ra<0.5µm, the accuracy with this probe is better)</small>	
			deep groove probe (optional), code ISR-C002-DGP1	

light duty test stand (optional)

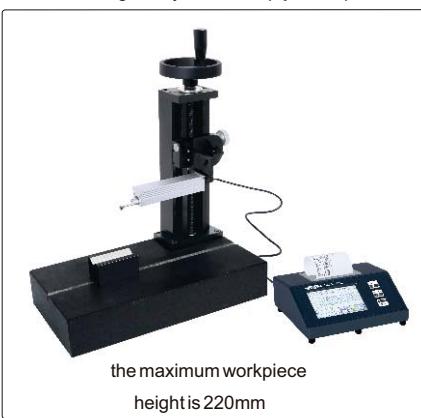

heavy duty test stand (optional)

**SPECIFICATION**

Parameters		Ra, Rz, Rq, Rv, Rp, Rs, R3z, R3y, Rt, Rc, Rz (JIS), Rk, Rku, Rsm, Rpc, Rpk, Rvk, Rsk, Mr1, Mr2, Ry, Rmax
Range	X axis	17.5mm
	Z axis	640μm (-320μm~320μm)
Accuracy		±10%
Resolution (Ra)		0.001μm
Probe	type	inductive
	stylus radius/angle	5μm/90°
	stylus material	diamond
Measuring force		4mN
Measuring unit		μm/μin
Cut off		0.25/0.8/2.5mm
Number of cut-offs		1~5
Traverse speed		0.135mm/s, 0.5mm/s, 1mm/s
Memory		100 measurement results
Output		bluetooth and USB
Power		built-in rechargeable battery
Dimension (L×W×H)		158×64×52mm
Weight		400g

OPTIONAL ACCESSORY

Extension rod	ISR-C002-ER
Small hole probe	ISR-C002-PROBE
Tiny hole probe	ISR-C002-SBP
2μm/60° probe	ISR-C300-P2UM
Deep groove probe	ISR-C002-DGP
Deep groove probe	ISR-C002-DGP1*
Height gage adapter	ISR-C300-LB1
Receiver	ISR-C300-RECEIVER
SPC cable	ISR-C300-SPC
Support for flat surface	ISR-C300-COVER1
Support for cylindrical surface	ISR-C300-COVER2
Light duty test stand	ISR-C002-STAND1
Heavy duty test stand	ISR-C002-STAND

*Need to be delivered with roughness tester ISR-T120

STANDARD DELIVERY

Main unit	1 pc
Standard probe	1 pc
Calibration block and support	1 pc of each
Magnetic stand adapter	1 pc
Adjustable stand	1 pc
Touch pen	1 pc
Software and USB cable	1 pc
AC/DC adapter	1 pc